

UNIVERSAL CALIBRATION INTELLIGENT COMPUTERIZED STAND

0.1µm

RESOLUTION



WIRELESS
DATA TRANSFER




TOLERANCE FUNCTION



MEMORY MANAGER



FORMULA MODE



TEMPERATURE
COMPENSATION




ERROR COMPENSATION



RECHARGEABLE
BATTERY

- Patent UA99686, UA103982, UA126928, UA131637, UA99931, W02016124992 by MICROTECH
- Universal calibration stands for indicators and bore gauges calibration
- Built in micro computer with colour Touchscreen display 1,5"
- Functions: Go/NoGo, Max/Min, Memory manager, Mathematical & Temperature error compensation
- Built in Wireless data transfer to Windows, Android, iOS devices with distance up to 50 m (with external antenna)
- USB connection to Windows PC in keyboard or normal mode (cable including)
- 100% metrological control in accredited laboratory by ISO17025 (Ilac MRA)

VIDEO

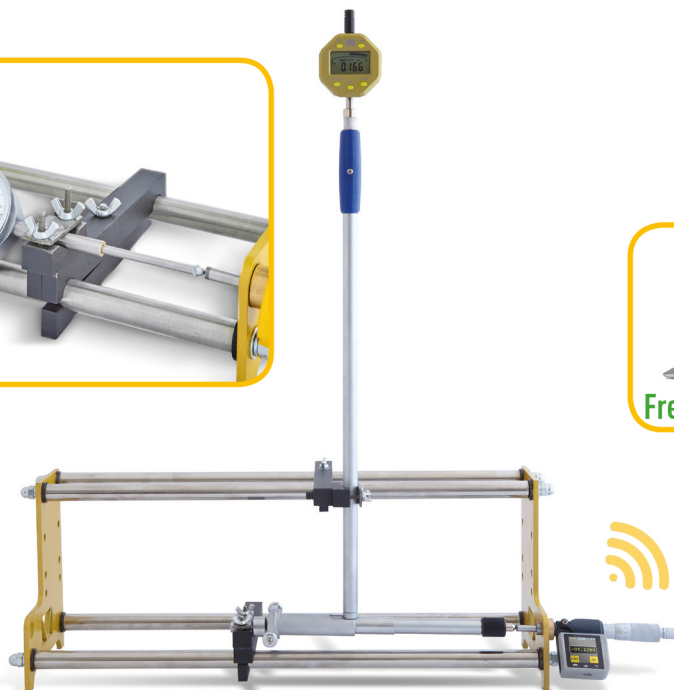

Free Software for Windows, Android, iOS



max 50 m
data transfer distance

Item No	Range	Resolution	Accuracy	Calibration	Functions	Data output	
						USB	Wireless
25111300	0-300	0,0001	±0,002	Bore gauges Indicators	Error comp.Temp.comp Preset. Memory Max/Min Limits	+	max 50 m
25111500	0-500	0,0001	±0,002			+	max 50 m
25111500	0-1000	0,0001	±0,002			+	max 50 m

DIAL INDICATOR CALIBRATION INTELLIGENT COMPUTERIZED STAND

VIDEO



Free Software for Windows, Android, iOS

Item No	Range	Resolution	Accuracy	Functions	Data output	
					USB	Wireless
25111026	0-25	0,0001	±0,002	Error comp. Temp.comp Preset. Memory Max/Min Limits	+	max 50 m
25111051	0-50	0,0001	±0,002		+	max 50 m



MICROTECH

since 1995



www.microtech.ua



ISO 17025



ISO 9001:2015